

Solargiga Energy  
**MONO-CRYSTALLINE CONVENTIONAL  
 HALF-CUT MODULE**  
**JMPV-X1/54-400~410(R)**

Maximum Power	Maximum Efficiency	Power Tolerance
<b>410W</b>	<b>21.00%</b>	<b>0~+5W</b>



**CELL TYPE**  
 P Type/M10/PERC/10BB/Half-Cell



**HIGH EFFICIENCY, HIGH GENERATION**  
 Based on 182mm wafer, more uniform current collection capability,  
 Half-Cell design reduces internal current and internal loss and improves output of module power.



**EXCELLENT ANTI-PID PERFORMANCE**  
 All products have excellent anti-PID performance to ensure module's  
 stable power output.



**SUPPORT 1500V SYSTEM**  
 Increase the number of system modules in series, reduce overall cost  
 of terminal power plant.




**STRONG MECHANICAL LOAD CAPACITY**  
 Withstand snow pressure up to 5400Pa on the front face  
 and wind pressure up to 2400Pa on the rear face.

- IEC 61215 / IEC 61730
- IEC 62804 : Anti-PID Test
- IEC 61701 : Salt Spray Test
- IEC 62716 : Ammonia Corrosion Test
- IEC 60068-2-68: Dust and Sand Test

**12 YEARS** Product Warranty

**25 YEARS** Power Output Warranty

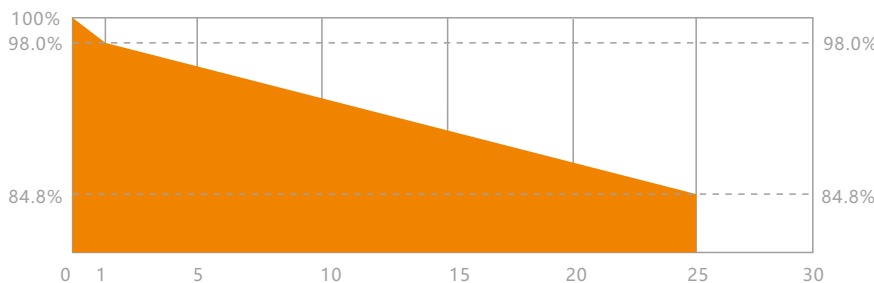

Solargiga Energy

Founded in 2000, Solargiga Energy Holdings Limited ( 'Solargiga Energy', HKEX:00757.HK ), is a renewable energy company which combines the business of the whole mono-crystalline industrial chain covering R&D manufacturing, photovoltaic application and global marketing. It's committed to provide PV products, technical support and integrated system solution for global customers.

# MONO-CRYSTALLINE CONVENTIONAL HALF-CUT MODULE

## JMPV-X1/54-400~410(R)

MODEL NUMBER	JMPV-X1/54-400~410(R)		
--------------	-----------------------	--	--

ELECTRICAL PARAMETERS (STC)			
Max Power (Pmax/W)	400	405	410
Max Power Voltage(Vmp/V)	30.92	31.11	31.30
Max Power Current (Imp/A)	12.94	13.02	13.10
Open Circuit Voltage(Voc/V)	37.29	37.55	37.79
Short Circuit Current (Isc/A)	13.66	13.73	13.81
Module Efficiency (%)	20.48	20.74	21.00

STC(Standard Test Condition): AM1.5, Irradiance 1000W/m<sup>2</sup> Cell Temperature 25°C

ELECTRICAL PARAMETERS (NMOT)			
Max Power (Pmax/W)	300.01	303.63	307.55
Max Power Voltage(Vmp/V)	28.82	29.00	29.18
Max Power Current (Imp/A)	10.41	10.47	10.54
Open Circuit Voltage(Voc/V)	35.34	35.59	35.81
Short Circuit Current (Isc/A)	11.08	11.13	11.20

NMOT(Nominal Module Operating Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS	
Cell Operating Temperature	42.5±2°C
Temperature Coefficient of Isc	0.054%/ °C
Temperature Coefficient of Voc	- 0.262%/ °C
Temperature Coefficient of Pmax	- 0.341%/ °C





MECHANICAL PARAMETERS	
Cell Type	P Type/M10/PERC/Bifacial/10BB/Half-Cell 182×91mm
Number of Cells	108 ( 6×9×2 )
Weight	20.7±1.0kg
Dimension	1722×1134×30mm
Glass	3.2mm Tempered Coated Glass
Encapsulating Material	EVA
Backsheet	Fluorinated Backsheet/Fluorine-free Backsheet (Black)
Frame	Anodized Aluminum 6063-T5/6005-T6 (Black)
Junction Box	Protection IP68
Cable	4.0 mm <sup>2</sup> +/-300mm or Customized Length

OPERATING CONDITIONS	
Max System Voltage	1500V
Operating Temperature	-40°C~+85°C
Max Series Fuse Rating	25A
Front Face Static Load (snow etc)	5400Pa
Rear Face Static Load (wind etc)	2400Pa

Installation should strictly obey the installation Manual of Solargiga Energy.

PACKING INFORMATION	
36pcs/pallet	936pcs/40'HQ

\*Power Test Uncertainty +/-3%

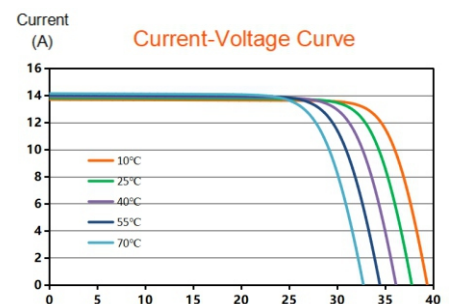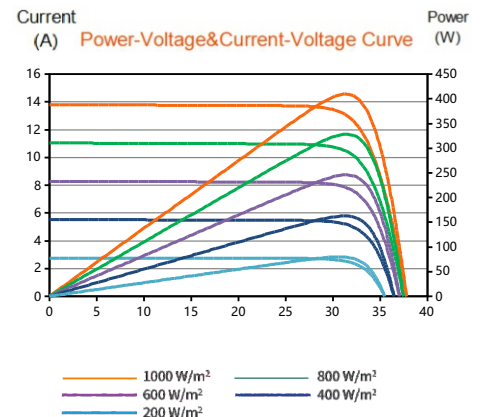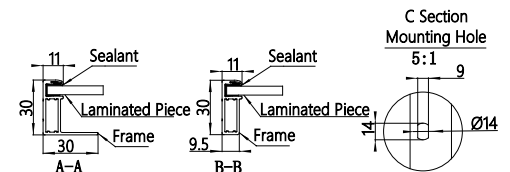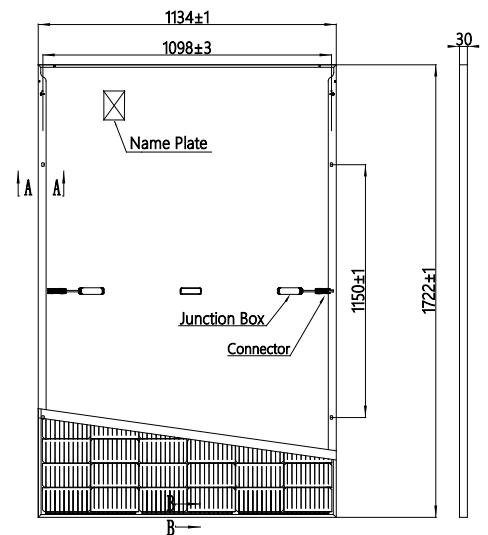

Sales HOT-line  
 Domestic Sales: (86)0416-5081178  
 E-mail : yin.wang1@jz.solargiga.com  
 Xihai Industry Park, Economic and Technical  
 Development Zone, Jinzhou, Liaoning  
 Province, CHINA.

Note: Electrical parameters are only used for comparison between different types of modules. Due to product innovation, Solargiga Energy reserves the right to adjust the information in this datasheet at any time without prior notice. The technical data in this datasheet may be slightly deviated. Customer shall obtain the latest version of the datasheet when signing contract and making it an integral part of the binding contract signed by both parties.

